
Pomona®

Model 3602 Shielded Housing, Size "D", BNC Female Both Ends

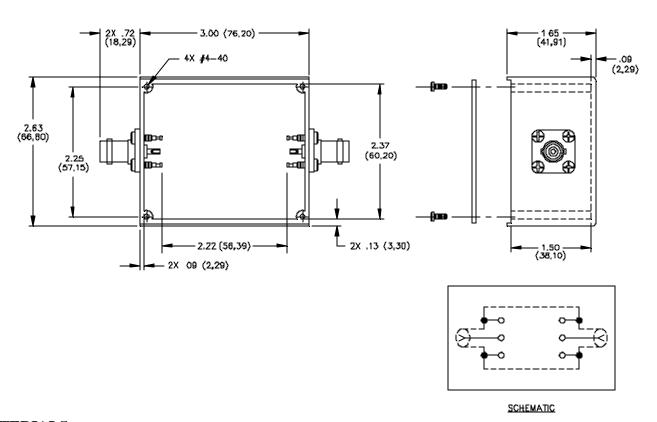

MATERIALS:

Connector: 2 each BNC Female

Finish:

Body and Fittings – Tarnish resistant Center Contact – Gold plated

Nominal Impedance: 50 Ohms.

Solder Turret Terminal Screws: 4 each, 4-40 pan head. Material: Steel.

Shielded Housing: Die cast aluminum Alloy A380 or A384.

Finish: Blue baked enamel per Federal Standard 595 #25109 over primer wash per DOD-P-15328.

Cover: 1.60 (.063) thick aluminum 1100-H14

Finish: Clear anodized

Screws: 8 each, #4-40 x 6.35 (1/4) with blue zinc plating.

RATINGS:

Operating Temperature: +150°C. (+302°F.) Max.

ORDERING INFORMATION: Model 3602

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS Technical Assistance: 800-241-2060