
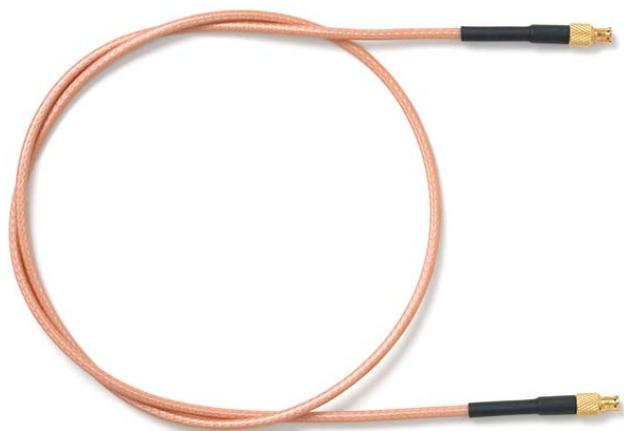


**Model 73067**  
**MCX Plug to MCX Plug, RG316/U**

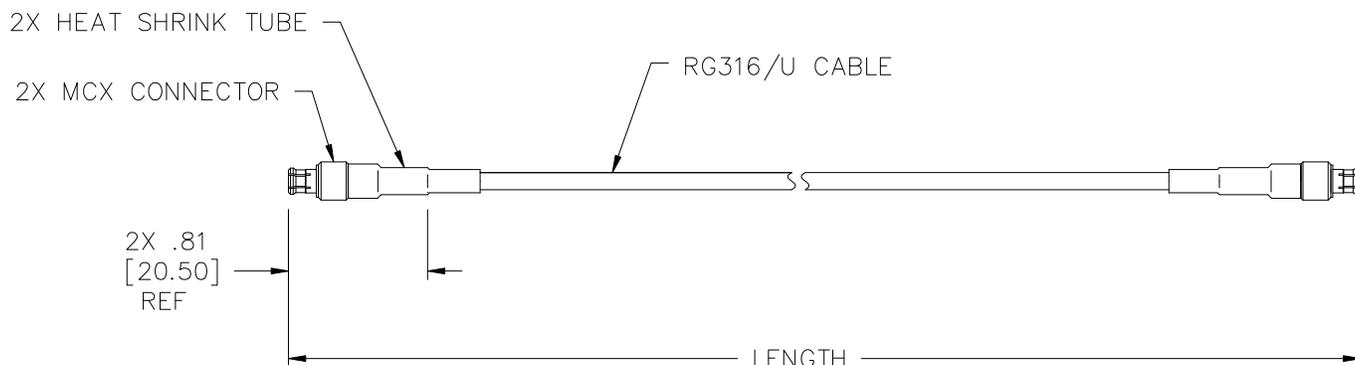

*Model 73067*  
*MCX Plug to MCX Plug, RG316/U*

**Materials**

**MCX Male Connectors:**

- Center Contact: Phosphor Bronze, Gold Plated
- Connector Body: Brass, Gold Plated
- Crimp Ferrule: Copper, Nickel Plated
- Insulators: PTFE

**Specifications**

|                              |   |
|------------------------------|---|
| <b>Cable Type</b>            | RG316/U                                       |
| <b>Impedance</b>             | 50Ω   |
| <b>Frequency Range</b>       | DC - 3GHz                                     |
| <b>Insulation Resistance</b> | ≥ 1000 MΩ                                     |
| <b>Insulator Withstand</b>   | 750V  |
| <b>Temperature Range</b>     | -55° C to +155°C<br>(-67°F to +311°F)         |
| <b>Jacket</b>                | FEP   |
| <b>Cable O.D.</b>            | 0.098" (2.5mm)                                |
| <b>Center Conductor (mm)</b> | 7 x .18 silver coated<br>copper covered steel |

Snap-on coupling and miniature size for fast connect and disconnect where space is limited

**Features**

- DC - 3GHz bandwidth.
- Connectors are precision machined and gold-plated for low loss.
- Perfect for applications where space, weight, performance and ease of connection are required.

**Ordering Information**

Model: **73067**

Cable Designator: **BB** = RG316/U

Standard Lengths: **6", 12", 24", 36"**

- 6" ± .118" (152mm ± 3mm)
- 12" ± .157" (305mm ± 4mm)
- 24" ± .275" (610mm ± 7mm)
- 36" ± .394" (914mm ± 10mm)

Ordering Example: **73067-BB-24**, Cable is RG316/U with length of 24" (610mm)

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.