


Model 3269
Adapter, BNC Female to Miniature Double Banana Plug

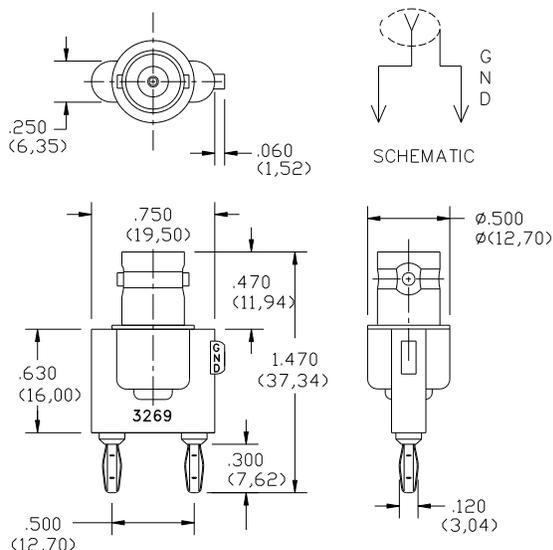

Features

- Allows a BNC male connection to be used with equipment having 0.5" (12.7mm) spaced miniature 0.104" (2.4mm) diameter banana jacks
- Excellent for adapting test equipment to BNC coaxial cables

Materials

Upper Conn: BNC Female

Finish: Tarnish Resistant

Center Contact: Gold Plated

Insulation: ABS molded to BNC male and Banana Plug

Color: Black

Lower Conn: Miniature Double Banana Plug

Material: Spring, Beryllium Copper

Plug Body: Brass

Finish: Gold Plated

Ratings

Operating Temperature: +50° C. (+122° F.) Max.

Operating Voltage: 500 Vrms, Maximum voltage for hands free use in controlled voltage environment.
For CE compliance, do not hold in hand when voltages exceed 30V AC / 60V DC.

Ordering Information: Model 3269

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.