


Model PVLEAD1 Solar PV Connector to 4mm Test Lead Set

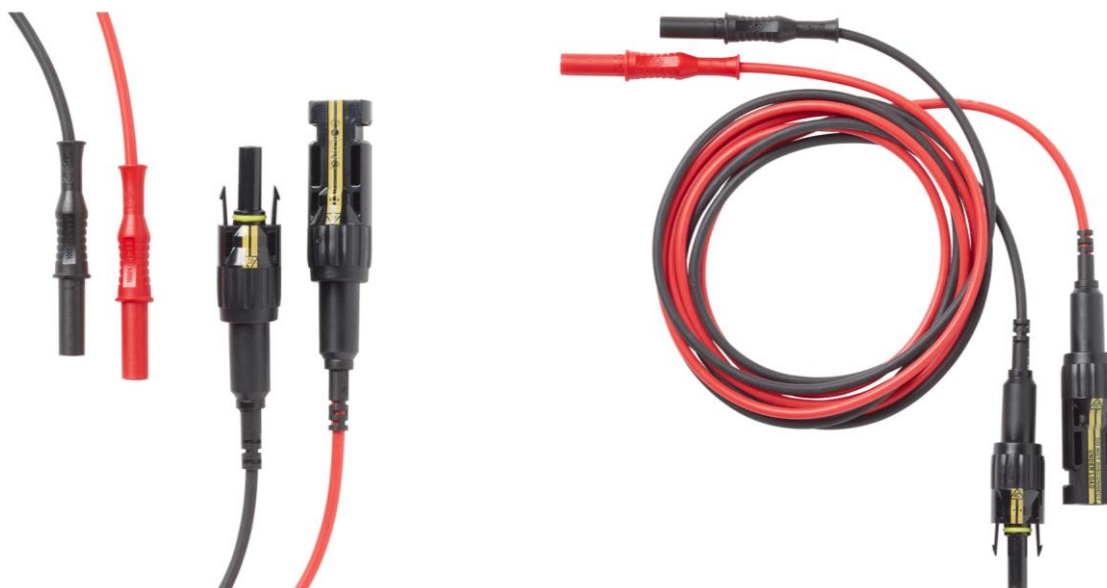

Features

- Set of black and red Solar PV connector to 4mm adapter test leads for solar applications
- The black lead is a PV connector (female) to 4mm sheathed banana plug on a 60-inch test lead
- The red lead is a PV connector (male) to 4mm sheathed banana plug on a 60-inch test lead
- Allows for connections to test tools that accept 4mm sheathed banana plugs
- Ensures safe current and voltage measurements on Photovoltaic (PV) modules and systems
- Connect measuring devices to PV power plants, for use in regular tests, measurements, and troubleshooting on solar PV panels
- Nickel plated contacts

Ratings

Voltage: Complies to IEC / EN 61010-031
CAT III 1000V / CAT IV 600V
Do Not Disconnect Under Load

Current: 20A

Temperature Range: +5°C to +40°C (+41°F to +104°F)

Ordering Information

Model: PVLEAD1
SOLAR PV CONNECTOR TO 4MM TEST LEAD SET, BLACK/RED



USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.